

**PURE LOOP MONO 4 legs Non stackable**

5034-4LNP / 5034-O4NP

Design Claus Breinholt



**FRAME**

TELAIO  
BASTIDOR

Round polished tube d.16, 2 mm thickness, in conformity with uni en 10305-3 rule.

Struttura in tubo pulito tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN10305-3.

Tubo redondo pulido de 16,2 mm de diámetro, 2 mm de espesor, conforme a la norma UNI EN 10305-3.




**OUTDOOR FRAME**

TELAIO OUTDOOR  
BASTIDOR PARA  
EXTERIORES

Epoxy-polyester powder painted frame for outdoor, average thickness 50 µ.

Telaio per esterno verniciato a polveri epossipoliestere spessore medio 50 µ.

Estructura pintada epoxy para exteriores, espesor medio de 50 µ.



**SHELL**

SCOCCA  
CARCASA

Post consumer industrial Polypropylene + Glass Fiber

Post consumer industrial Polypropylene + Glass Fiber

Post consumer industrial Polypropylene + Glass Fiber



Polypropylene + Glass Fiber

Polypropylene + Glass Fiber

Polypropylene + Glass Fiber



**FINISHING**

FINITURA  
ACABADO

Chrome plating with medium thickness 5 µ. Painted frame with epoxy-polyester powder with average thickness of 50 µ.

Telaio cromato con spessore medio 5 µ. Telaio verniciato con polveri epossipoliestere spessore medio 50 µ.

Cromado con 5 µ de espesor medio. Bastidor con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

**PKG**


IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	59	64	97.5	0.37	1	9

## PURE LOOP MONO 4 legs non stackable with seat panel

5034-4LNS

Design Claus Breinholt

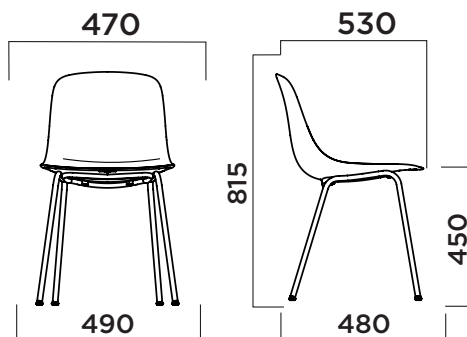

### FRAME

TELAIO  
BASTIDOR

Round polished tube d.16, 2 mm thickness, in conformity with uni en 10305-3 rule.

Struttura in tubo pulito tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN10305-3.

Tubo redondo pulido de 16,2 mm de diámetro, 2 mm de espesor, conforme a la norma UNI EN 10305-3.



### SHELL

SCOCCA  
CARCASA

Post consumer industrial Polypropylene + Glass Fiber

Post consumer industrial Polypropylene + Glass Fiber

Post consumer industrial Polypropylene + Glass Fiber



Polypropylene + Glass Fiber

Polypropylene + Glass Fiber

Polypropylene + Glass Fiber



### UPHOLSTERY

TAPPEZZERIA  
TAPIZADOS

Upholstered seat panel in PP with cutted foam thickness 1 cm and density 50 kg/m3

Upholstered seat panel in PP with cutted foam thickness 1 cm and density 50 kg/m3

Upholstered seat panel in PP with cutted foam thickness 1 cm and density 50 kg/m3

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

0.60 0.75

### FINISHING

FINITURA  
ACABADO

Chrome plating with medium thickness 5 μ. Painted frame with epoxy-polyester powder with average thickness of 50 μ.

Telaio cromato con spessore medio 5 μ. Telaio verniciato con polveri epossi-poliéster spessore medio 50 μ.

Cromado con 5 μ de espesor medio. Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio.

### PKG


IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	46.5	57	81.5	0.22	1	10

**PURE LOOP MONO 4 legs fully upholstered Non stackable**

5034-4LNT

Design Claus Breinholt

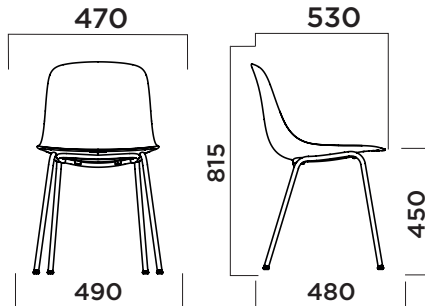

**FRAME**

TELAIO  
BASTIDOR

Round polished tube d.16, 2 mm thickness, in conformity with uni en 10305-3 rule.

Struttura in tubo pulito tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN10305-3.

Tubo redondo pulido de 16,2 mm de diámetro, 2 mm de espesor, conforme a la norma UNI EN 10305-3.



**UPHOLSTERY**

TAPPEZZERIA  
TAPIZADOS

Full upholstered shell

Full upholstered shell

Full upholstered shell

- A** Space, Panarea
- B** Eco Leather
- C** Convert D, Velvety, Step, Step Melange, Nuvole
- D** Reflect ♻️
- E** Field, Oceanic ♻️, Yoredale
- F** Steelcut Quartet, Canvas2
- G** Divina3, Divina Melange, Fiord
- H** Full Leather

**COM Fabric(m) COM Leather(m2)**

**0,90 1,50**

**FINISHING**

FINITURA  
ACABADO

Chrome plating with medium thickness 5 μ. Painted frame with epoxy-polyester powder with average thickness of 50 μ.

Telaio cromato con spessore medio 5 μ. Telaio verniciato con polveri epossi-poliestere spessore medio 50 μ.

Cromado con 5 μ de espesor medio. Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio.

**PKG**

IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	64	97.5	0.37	1	28	