


PURE LOOP MONO 4 legs

5034-4LGP / 5034-O4LP

Design Claus Breinholt

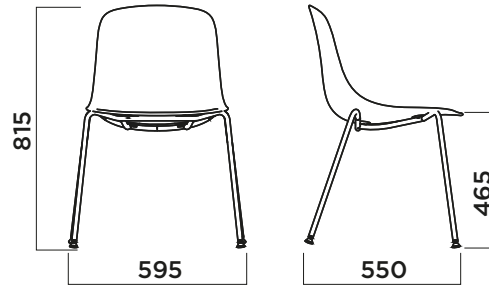

FRAME

TELAIO
BASTIDOR

Round polished tube d.16, 2 mm thickness, in conformity with uni en 10305-3 rule.

Struttura in tubo pulito tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN10305-3.

Tubo redondo pulido de 16,2 mm de diámetro, 2 mm de espesor, conforme a la norma UNI EN 10305-3.



OUTDOOR FRAME

TELAIO OUTDOOR
BASTIDOR PARA
EXTERIORES

Epoxy-polyester powder painted frame for outdoor, average thickness 50 µ.

Telaio per esterno verniciato a polveri epossipoliestere spessore medio 50 µ.

Estructura pintada epoxy para exteriores, espesor medio de 50 µ.



SHELL

SCOCCA
CARCASA

Post consumer industrial Polypropylene + Glass Fiber

Post consumer industrial Polypropylene + Glass Fiber

Post consumer industrial Polypropylene + Glass Fiber



Polypropylene + Glass Fiber

Polypropylene + Glass Fiber

Polypropylene + Glass Fiber



FINISHING

FINITURA
ACABADO

Chrome plating with medium thickness 5 µ. Painted frame with epoxy-polyester powder with average thickness of 50 µ.

Telaio cromato con spessore medio 5 µ. Telaio verniciato con polveri epossipoliestere spessore medio 50 µ.

Cromado con 5 µ de espesor medio. Bastidor con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	59	64	97.5	0.37	4	28

PURE LOOP MONO 4 legs upholstered seat panel

5034-4LGS

Design Claus Breinholt

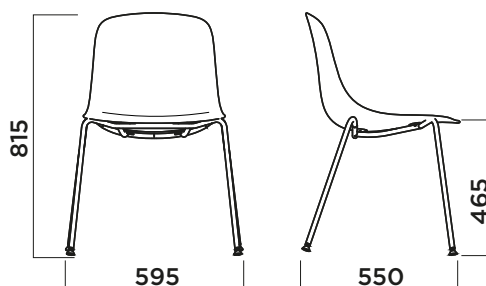

FRAME

TELAIO
BASTIDOR

Round polished tube d.16, 2 mm thickness, in conformity with uni en 10305-3 rule.

Struttura in tubo pulito tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN10305-3.

Tubo redondo pulido de 16,2 mm de diámetro, 2 mm de espesor, conforme a la norma UNI EN 10305-3.



SHELL

SCocca
CARCASA

Post consumer industrial Polypropylene + Glass Fiber

Post consumer industrial Polypropylene + Glass Fiber

Post consumer industrial Polypropylene + Glass Fiber



Polypropylene + Glass Fiber

Polypropylene + Glass Fiber

Polypropylene + Glass Fiber



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Upholstered seat panel in PP with cutted foam thickness 1 cm and density 50 kg/m3

Upholstered seat panel in PP with cutted foam thickness 1 cm and density 50 kg/m3

Upholstered seat panel in PP with cutted foam thickness 1 cm and density 50 kg/m3

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

0.60 0.75

FINISHING

FINITURA
ACABADO

Chrome plating with medium thickness 5 μ. Painted frame with epoxy-polyester powder with average thickness of 50 μ.

Telaio cromato con spessore medio 5 μ. Telaio verniciato con polveri epossi-poliesteri spessore medio 50 μ.

Cromado con 5 μ de espesor medio. Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio.

PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	46.5	57	81.5	0.22	2	14

PURE LOOP MONO 4 legs fully upholstered

5034-4LGT

Design Claus Breinholt

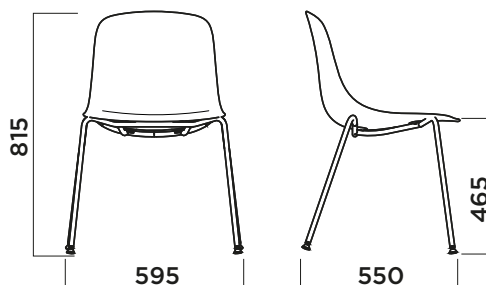

FRAME

TELAIO
BASTIDOR

Round polished tube d.16, 2 mm thickness, in conformity with uni en 10305-3 rule.

Struttura in tubo pulito tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN10305-3.

Tubo redondo pulido de 16,2 mm de diámetro, 2 mm de espesor, conforme a la norma UNI EN 10305-3.



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Full upholstered shell

Full upholstered shell

Full upholstered shell

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

0,90 1,50

FINISHING

FINITURA
ACABADO

Chrome plating with medium thickness 5 μ. Painted frame with epoxy-polyester powder with average thickness of 50 μ.

Telaio cromato con spessore medio 5 μ. Telaio verniciato con polveri epossi-poliesteri spessore medio 50 μ.

Cromado con 5 μ de espesor medio. Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio.

PKG

IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	59	64	97.5	0.37	4	28